

OSC


PO135M Series

Sinewave


8PIN DIP PACKAGE

* PART NUMBERING GUIDE


P O 1 3 5 M - 5 S 1 0 3 D E - 3 2 . 0 0 0 M

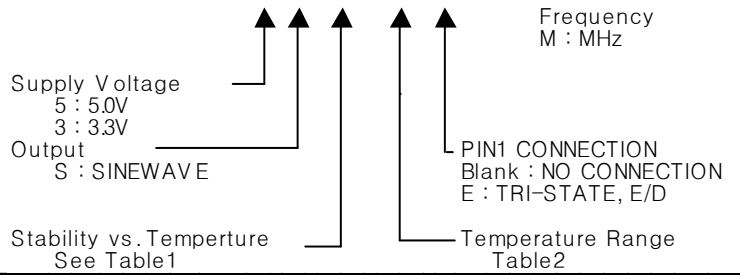


MECHANICAL DIMENSIONS	ELECTRICAL SPECIFICATION
-----------------------	--------------------------

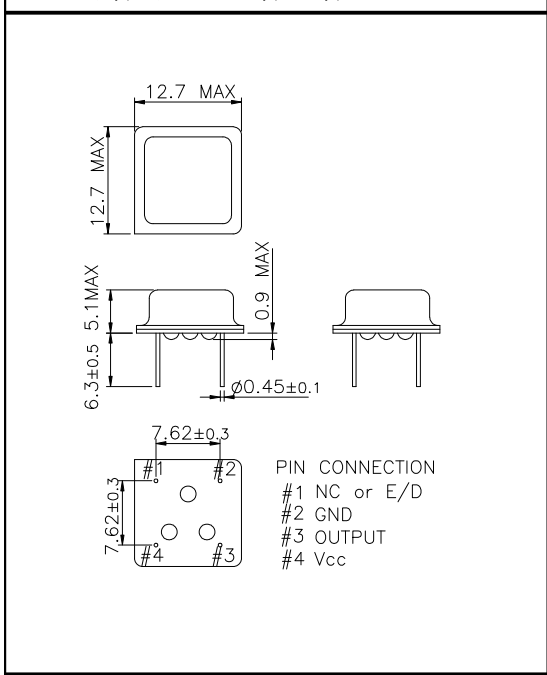

Frequency range	10.000MHz to 50.000MHz All combination of Frequency range Vs. Package type might not be available ,please contact factory		
Frequency Stability vs. Temperature vs. Aging	± 10 ppm to ±50ppm ±3.0 ppm max/ year		
Temperature Range Operating Storage	See Table 2 -55°C to 105°C		
Supply Voltage	3.3V ± 5% 5.0V ± 5%		
Input Current	fo ≤ 25.000MHz fo ≤ 50.000MHz	3.3V 15mA 25mA	5.0V 20mA 30mA
Output characteristics	Sinewave Level 3.3V 0 dBm typ 5.0V 10 dBm typ Load 50Ω		
Pin 1 Tri-State Input Voltage	No Connection Vh ≥ 2.0 Vdc Vl ≤ 0.8 Vdc	Disable Output Enable Output Disable Output	

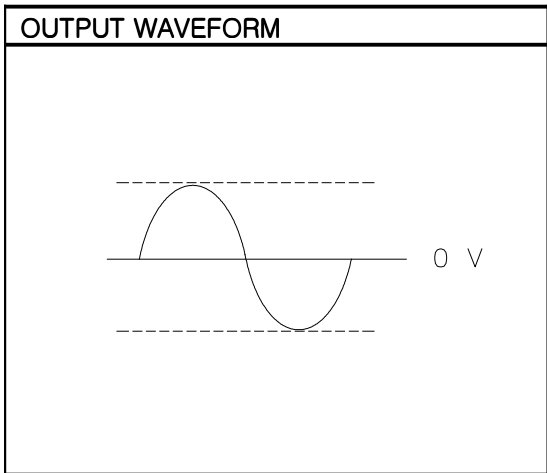

TEST CIRCUIT

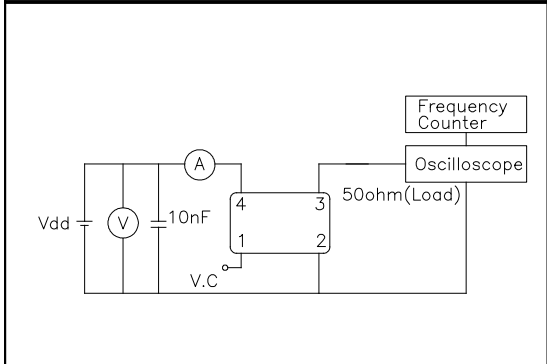

ENVIROMENTAL & MECHANICAL SPECIFICATION

Shock	MIL-STD-883C, Method 2002, Condition B
Vibration	MIL-STD-883C, Method 2007, Condition A
Solderability	MIL-STD-883C, Method 2003
Seal integrity	MIL-STD-883C, Method 1014, Condition C & A2
Marking	MIL-STD-202F, Method 215

Symbol	Stability
10	± 10ppm
15	± 15ppm
20	± 20ppm
30	± 30ppm
50	± 50ppm
100	±100ppm

Symbol	Temp.	Symbol	Temp.
0	0°C	A	50°C
1	-10°C	B	60°C
2	-20°C	C	70°C
3	-30°C	D	75°C
4	-40°C	E	80°C
		F	85°C