


TCXO

PT205M/PT207M Series
Clipped sinewave
14PIN DIP PACKAGE

* PART NUMBERING GUIDE

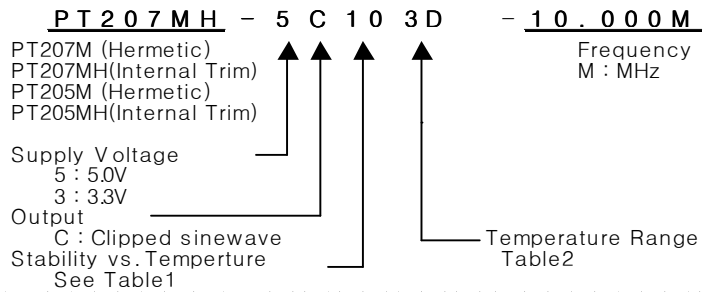

MECHANICAL DIMENSIONS	ELECTRICAL SPECIFICATION																																																												
<table border="1"> <tr> <th>TYPE</th> <th>"H" SIZE</th> </tr> <tr> <td>PC205M</td> <td>5.1 MAX</td> </tr> <tr> <td>PC207M</td> <td>7.5 MAX</td> </tr> </table> <p>PIN CONNECTION #1 N.C #2 GND #3 OUTPUT #4 Vcc</p>	TYPE	"H" SIZE	PC205M	5.1 MAX	PC207M	7.5 MAX	<table border="1"> <tr> <td>Frequency range</td> <td>6.000MHz to 190.000MHz All combination of Frequency range Vs. Package type might not be available ,please contact factory.</td> </tr> <tr> <td>Frequency Stability vs. Temperature vs. Supply Voltage vs. Load vs. Aging</td> <td>±0.5 ppm to ±5.0ppm ±0.1 / ±0.2 ppm max / Vdd ± 5% ±0.2 ppm max /15pF ±10% ±1.0 ppm max/ year</td> </tr> <tr> <td>Temperature Range Operating Storage</td> <td>See Table 2 -55°C to 125°C</td> </tr> <tr> <td>Supply Voltage</td> <td>3.3V ± 5% 5.0V ± 5%</td> </tr> <tr> <td>Input Current Clipped sinewave</td> <td>6.00MHz ~ 190.000MHz 2.0mA max ~ 30mA max</td> </tr> <tr> <td>Output characteristics</td> <td>Clipped sinewave Level 3.3V 0.8Vp-p min 5.0V 1.0Vp-p min Load 10kΩ//10pF</td> </tr> <tr> <td>Phase Noise (typical) 20MHz offset</td> <td>-80 dBc / Hz @ 10Hz -120 dBc / Hz @ 100Hz -135 dBc / Hz @ 1KHz -140 dBc / Hz @ 10KHz -145 dBc / Hz @100KHz</td> </tr> <tr> <td>Frequency Adjustment</td> <td>±3ppm min by internal trimmer(OPTION)</td> </tr> </table>	Frequency range	6.000MHz to 190.000MHz All combination of Frequency range Vs. Package type might not be available ,please contact factory.	Frequency Stability vs. Temperature vs. Supply Voltage vs. Load vs. Aging	±0.5 ppm to ±5.0ppm ±0.1 / ±0.2 ppm max / Vdd ± 5% ±0.2 ppm max /15pF ±10% ±1.0 ppm max/ year	Temperature Range Operating Storage	See Table 2 -55°C to 125°C	Supply Voltage	3.3V ± 5% 5.0V ± 5%	Input Current Clipped sinewave	6.00MHz ~ 190.000MHz 2.0mA max ~ 30mA max	Output characteristics	Clipped sinewave Level 3.3V 0.8Vp-p min 5.0V 1.0Vp-p min Load 10kΩ//10pF	Phase Noise (typical) 20MHz offset	-80 dBc / Hz @ 10Hz -120 dBc / Hz @ 100Hz -135 dBc / Hz @ 1KHz -140 dBc / Hz @ 10KHz -145 dBc / Hz @100KHz	Frequency Adjustment	±3ppm min by internal trimmer(OPTION)																																						
TYPE	"H" SIZE																																																												
PC205M	5.1 MAX																																																												
PC207M	7.5 MAX																																																												
Frequency range	6.000MHz to 190.000MHz All combination of Frequency range Vs. Package type might not be available ,please contact factory.																																																												
Frequency Stability vs. Temperature vs. Supply Voltage vs. Load vs. Aging	±0.5 ppm to ±5.0ppm ±0.1 / ±0.2 ppm max / Vdd ± 5% ±0.2 ppm max /15pF ±10% ±1.0 ppm max/ year																																																												
Temperature Range Operating Storage	See Table 2 -55°C to 125°C																																																												
Supply Voltage	3.3V ± 5% 5.0V ± 5%																																																												
Input Current Clipped sinewave	6.00MHz ~ 190.000MHz 2.0mA max ~ 30mA max																																																												
Output characteristics	Clipped sinewave Level 3.3V 0.8Vp-p min 5.0V 1.0Vp-p min Load 10kΩ//10pF																																																												
Phase Noise (typical) 20MHz offset	-80 dBc / Hz @ 10Hz -120 dBc / Hz @ 100Hz -135 dBc / Hz @ 1KHz -140 dBc / Hz @ 10KHz -145 dBc / Hz @100KHz																																																												
Frequency Adjustment	±3ppm min by internal trimmer(OPTION)																																																												
<h3>OUTPUT WAVEFORM</h3>	<h3>ENVIROMENTAL & MECHANICAL SPECIFICATION</h3> <table border="1"> <tr> <td>Shock</td> <td>MIL-STD-883C, Method 2002, Condition B</td> </tr> <tr> <td>Vibration</td> <td>MIL-STD-883C, Method 2007, Condition A</td> </tr> <tr> <td>Solderability</td> <td>MIL-STD-883C, Method 2003</td> </tr> <tr> <td>Seal integrity</td> <td>MIL-STD-883C, Method 1014, Condition C & A2</td> </tr> <tr> <td>Marking</td> <td>MIL-STD-202F, Method 215</td> </tr> </table>	Shock	MIL-STD-883C, Method 2002, Condition B	Vibration	MIL-STD-883C, Method 2007, Condition A	Solderability	MIL-STD-883C, Method 2003	Seal integrity	MIL-STD-883C, Method 1014, Condition C & A2	Marking	MIL-STD-202F, Method 215																																																		
Shock	MIL-STD-883C, Method 2002, Condition B																																																												
Vibration	MIL-STD-883C, Method 2007, Condition A																																																												
Solderability	MIL-STD-883C, Method 2003																																																												
Seal integrity	MIL-STD-883C, Method 1014, Condition C & A2																																																												
Marking	MIL-STD-202F, Method 215																																																												
<h3>TEST CIRCUIT</h3>	<table border="1"> <thead> <tr> <th colspan="2">TABLE1</th> <th colspan="4">TABLE2</th> </tr> <tr> <th>Symbol</th> <th>Stability</th> <th>Symbol</th> <th>Temp.</th> <th>Symbol</th> <th>Temp.</th> </tr> </thead> <tbody> <tr> <td>05</td> <td>±0.5ppm</td> <td>0</td> <td>0°C</td> <td>A</td> <td>50°C</td> </tr> <tr> <td>10</td> <td>±1.0ppm</td> <td>1</td> <td>-10°C</td> <td>B</td> <td>60°C</td> </tr> <tr> <td>15</td> <td>±1.5ppm</td> <td>2</td> <td>-20°C</td> <td>C</td> <td>70°C</td> </tr> <tr> <td>20</td> <td>±2.0ppm</td> <td>3</td> <td>-30°C</td> <td>D</td> <td>75°C</td> </tr> <tr> <td>25</td> <td>±2.5ppm</td> <td>4</td> <td>-40°C</td> <td>E</td> <td>80°C</td> </tr> <tr> <td>30</td> <td>±3.0ppm</td> <td></td> <td></td> <td>F</td> <td>85°C</td> </tr> <tr> <td>35</td> <td>±3.5ppm</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>50</td> <td>±5.0ppm</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	TABLE1		TABLE2				Symbol	Stability	Symbol	Temp.	Symbol	Temp.	05	±0.5ppm	0	0°C	A	50°C	10	±1.0ppm	1	-10°C	B	60°C	15	±1.5ppm	2	-20°C	C	70°C	20	±2.0ppm	3	-30°C	D	75°C	25	±2.5ppm	4	-40°C	E	80°C	30	±3.0ppm			F	85°C	35	±3.5ppm					50	±5.0ppm				
TABLE1		TABLE2																																																											
Symbol	Stability	Symbol	Temp.	Symbol	Temp.																																																								
05	±0.5ppm	0	0°C	A	50°C																																																								
10	±1.0ppm	1	-10°C	B	60°C																																																								
15	±1.5ppm	2	-20°C	C	70°C																																																								
20	±2.0ppm	3	-30°C	D	75°C																																																								
25	±2.5ppm	4	-40°C	E	80°C																																																								
30	±3.0ppm			F	85°C																																																								
35	±3.5ppm																																																												
50	±5.0ppm																																																												