
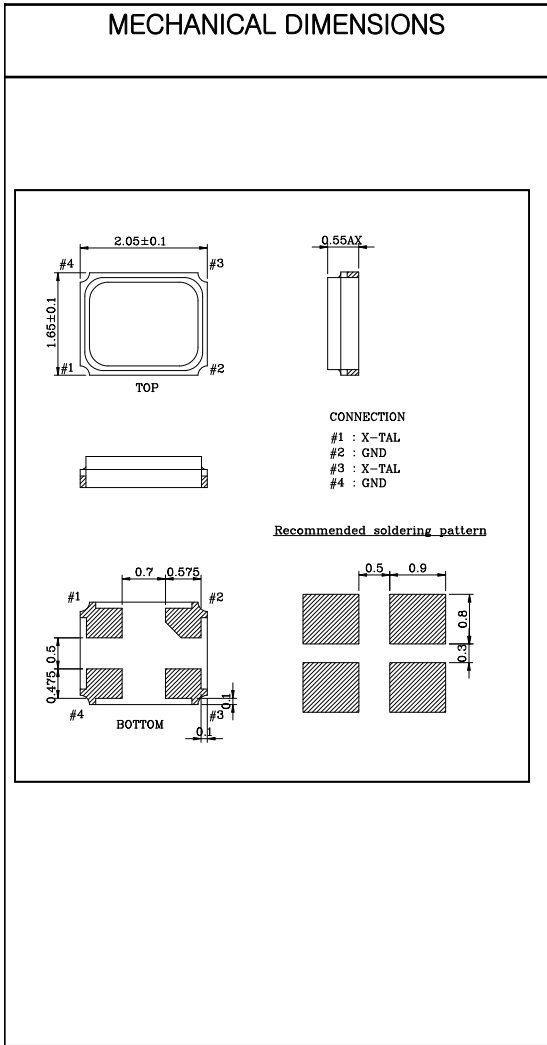


# X-TAL

PXS8 : 2.0\*1.6mm  
SMD PACKAGE

## \* PART NUMBERING GUIDE

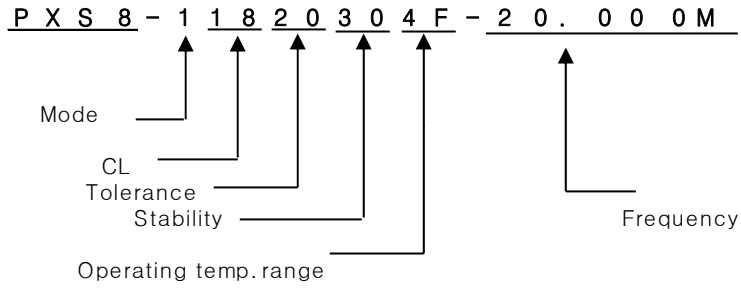

### ELECTRICAL SPECIFICATION

Frequency Range	16.000MHz to 285.000MHz	
Load Capacitance(CL)	See Table1	
Oscillation Mode	1 : Fundamental	
Frequency Tolerance at 25°C(RT)	Standard ±10.0ppm See Table2	
Frequency Stability over Operating temperature range(TC)	Standard ±30.0ppm/-40~85°C See Table3	
Temperature Range Operating(TR) Storage	See Table 4 -55°C to +125°C	
Drive Level(DL)	200 uW max.	
Shunt Capacitance(C0)	1.5pF max	
Aging	±2.0ppm per year max	
Insulation Resistance(IR)	500MΩ min at 100Vdc	
Frequency Range(MHz)	ESR(Ω max)	Mode
16.000~20.000	200	AT FUND
20.001~24.000	100	AT FUND
24.001~285.000	50	AT FUND

Table1		Table2		Table3		Table4			
Load Capacitance		Frequency Tolerance		Frequency Stability		Operating Temp. Range			
Symbol	CL(pF)	Symbol	RT(ppm)	Symbol	TC(ppm)	Symbol	TR(°C)	Symbol	TR(°C)
08	8	10	±10	30	±30	0	0	A	+50
10	10	XX	±XX	XX	±XX	1	-10	B	+60
18	18					2	-20	C	+70
30	30					3	-30	D	+75
S	Series					4	-40	E	+80
XX	XX							F	+85